



iDesigno

10W Adatto Adjustable Light

TECHNICAL DATA SHEET

The 10W Adatto adjustable light features multiple installation options including surface, track and suspended for versatile applications. The lamp body rotates 90° vertically and 315° horizontally, allowing precise directional lighting alongside interchangeable CCT for adaptable illumination, making it the ideal choice for a range of lighting applications.

Areas for Application

- Foyers
- Office Spaces
- Shopping Centres
- Commercial Complexes
 - Exhibitions
 - Museums
 - Art Galleries
- Feature Lighting

8/94 Forsyth Street O'Connor WA, 6163

+61 (08) 6371 1780

sales@ledtec.com.au

www.iDesigno.com.au

iDesigno is a brand by Ledtec



LEDTEC

TECHNICAL SPECIFICATIONS

| Product | |
|-------------------------------|----------------------------|
| Model - Pendant Light - White | ID-PDU-ADA-10W-60-3CCT-WHT |
| Model - Pendant Light - Black | ID-PDU-ADA-10W-60-3CCT-BLK |

| Luminaire Information | |
|--------------------------|------------------------|
| Rated Power | 10W |
| Fixture Installation | Surface Mount |
| | Track Installation |
| | Suspended Installation |
| Dimmable Options | Dimmable |
| | DALI Dimmable Optional |
| CCT Selection DIP Switch | Yes |

| Driver Information | |
|--------------------|-----------------------|
| Driver Type | Built In |
| Dimming Option | Triac Dimmable Driver |
| Input Voltage | 220 - 240VAC |

| Warranty | |
|----------|---------|
| Warranty | 5 Years |


| Material & Finish | |
|---------------------------|---------------------|
| Ingress Protection Rating | IP20 |
| Material Composition | Aluminium (Housing) |
| | PC (Optics) |
| Product Finish | RAL9016 - White |
| | RAL9005 - Black |

| Product Dimensions (mm) | |
|---------------------------|-------------|
| Surface Mount | Ø65 x 206mm |
| Track Installation | Ø65 x 248mm |
| Track Installation (DALI) | Ø65 x 259mm |
| Suspended Installation | Ø65mm |


| Optical Characteristics | |
|-------------------------------|-----------------------|
| Correlated Colour Temperature | 3000K + 4000K + 5000K |
| Colour Rendering Index | 90 Ra |
| LED Type | COB |
| LED Expected Lifespan | 50,000 hrs |
| Luminous Flux | 810 - 850lm |
| Beam Angle | 60° |
| SDCM | <3 |

SIZE DIAGRAMS


SURFACE MOUNT

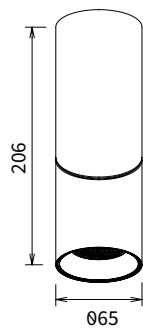


SURFACE MOUNT CANOPY



TRACK INSTALLATION

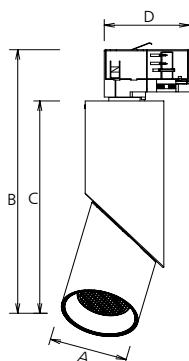


A: Ø65
B: 248
C: 206
D: 70




A: Ø62
B: 54
C: 70




TRACK INSTALLATION - DALI

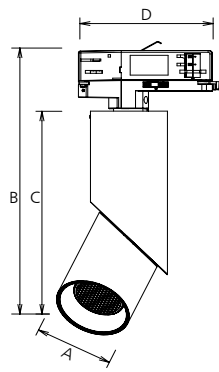


A: Ø65
B: 259
C: 206
D: 113

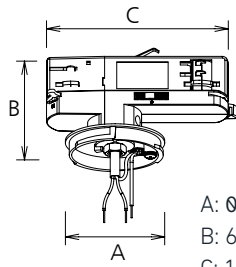

A: Ø62
B: 64
C: 113

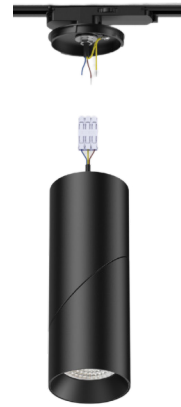

SUSPENDED INSTALLATION

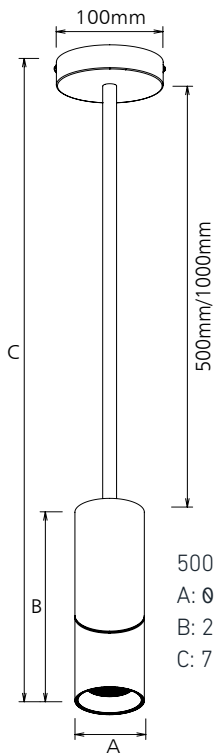

500MM 1000MM
A: Ø65 A: Ø65
B: 206 B: 206
C: 731 C: 1231

500MM
A: 534.5
1000mm
A: 1034.5

