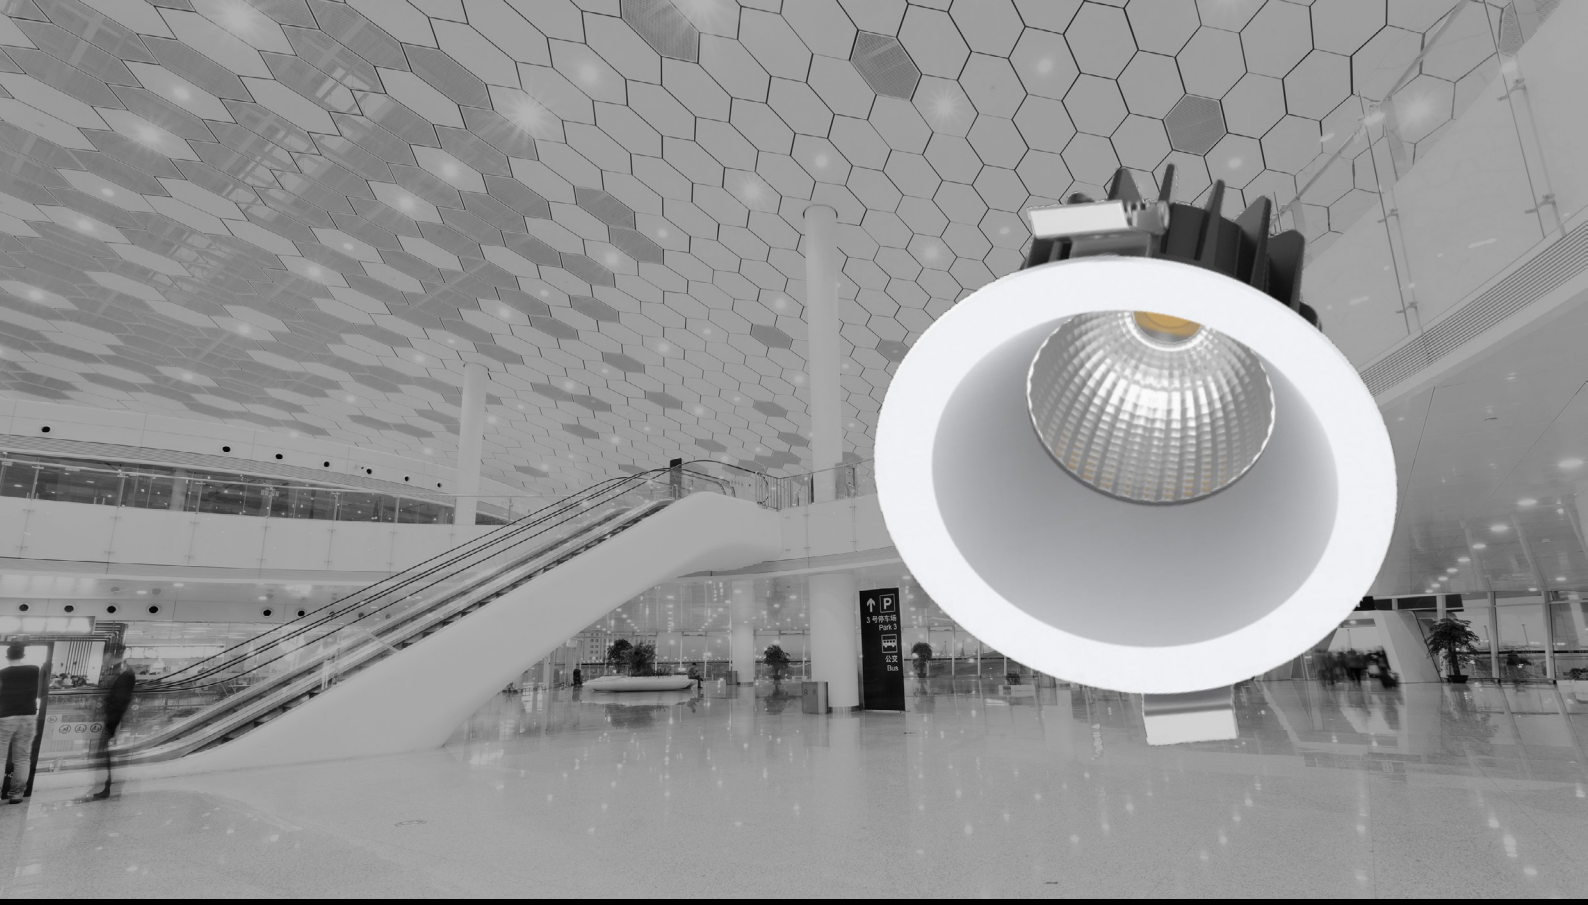

iDesigno

13W Elegante Downlight

TECHNICAL DATA SHEET

The Elegante Downlight series features a deep reflector design for UGR <19, ensuring low glare and visual comfort. With an external flicker-free driver, it delivers stable illumination, making it ideal for general lighting applications and public areas where performance and comfort are essential.

Areas for Application

- Offices and workspaces
- Retail Stores
- Shopping Centres
- Educational Facilities
- Commercial Complexes

8/94 Forsyth Street
O'Connor WA 6163
08 6371 1780
sales@ledtec.com.au
www.iDesigno.com.au
iDesigno is a brand by Ledtec

Lighting Council AUSTRALIA MEMBER

ies Corporate Member 2024/2025

100% AUSTRALIAN OWNED & OPERATED

LEDTEC

TECHNICAL SPECIFICATIONS

Product	
Model - White	*ID-DLU-ELE-13W-60-4K-WH*
Model - Black	*ID-DLU-ELE-13W-60-4K-BK*

Luminaire Information	
Rated Power	*13W*
Fixture Installation	*Recessed*
Dimmable Options	*Dimmable* *DALI Dimmable Optional*

Driver Information	
Driver Type	*Tridonic Flicker Free*
Dimming Option	*Triac Dimmable Driver*
Input Voltage	*220 - 240VAC*

Warranty	
Warranty	*5 Years*

Material & Finish	
Ingress Protection Rating	*IP44*
Material Composition	*Aluminium*
Product Finish	*RAL9016 - White* *RAL9005 - Black*
IC Rating	*IC4*

Product Dimensions	
Dimensions	*Ø150 x 97mm*
Cut Out	*Ø120 - 130mm*

Optical Characteristics	
Correlated Colour Temperature	*4000K Standard* *2700K - 5000K Optional*
Colour Rendering Index	*>90RA*
LED Type	*CREE COB*
LED Expected Lifespan	*50,000 hrs*
Luminous Flux	*1070- 1170lm*
Beam Angle	*60°*
UGR	*<19*
SDCM	*<3*

SIZE DIAGRAMS

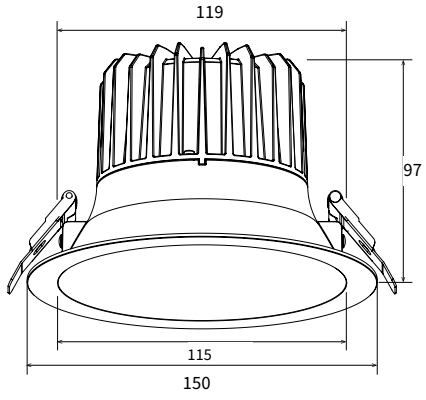



© iDesigno - January 2025