iDesigno
13W Inclino Downlight

TECHNICAL DATA SHEET

The Inclino range is a high-efficiency downlight featuring a flexible rotary head for precise angle adjustment and simplified installation. Designed to deliver strong lumen output with enhanced versatility, it's ideal for commercial projects requiring reliable performance and flexible lighting control.

Areas for Application

- Retail Stores
- Offices
- Showrooms
- Reception Areas
- Commercial Areas

8/94 Forsyth Street
O'Connor WA 6163
08 6371 1780
sales@ledtec.com.au
www.iDesigno.com.au
iDesigno is a brand by Ledtec

Lighting Council AUSTRALIA MEMBER

ies Corporate Member 2024/2025

100% AUSTRALIAN OWNED & OPERATED

LEDTEC

TECHNICAL SPECIFICATIONS

Product	
Model	*ID-DLU-INC-13W-60-4K-WH*

Luminaire Information	
Rated Power	*10W*
Installation	*Recessed*
Dimming Option	*Dimmable*
Rotation of Head	*25 - 30° Flexible Rotary Head*

Driver Information	
Driver Type	*Built In Flicker Free*
Dimming Option	*Triac Dimmable*
Rated Input Voltage	*AC 220 - 240V*

Warranty	
Warranty	*5 Years*

Material & Finish	
Ingress Protection Rating	*IP20*
Material Composition (Housing)	*Aluminum Die-Casting*
Material Composition (Lens)	*PC*
Product Finish (Base)	*White RAL9016*
IC Rating	*IC4*

Product Dimensions	
Dimensions	*Ø110 x 47mm*
Cut Out	*Ø90 - 95mm*

Optical Characteristics	
Correlated Colour Temperature	*4000K Standard* *2700K - 5000K Optional*
Colour Rendering Index	*90Ra*
LED Type	*COB*
LED Expected Lifespan	*50,000hrs*
Luminous Flux	*1450 - 1550lms*
Beam Angle	*60°*
SDCM	*<3*

SIZE DIAGRAMS

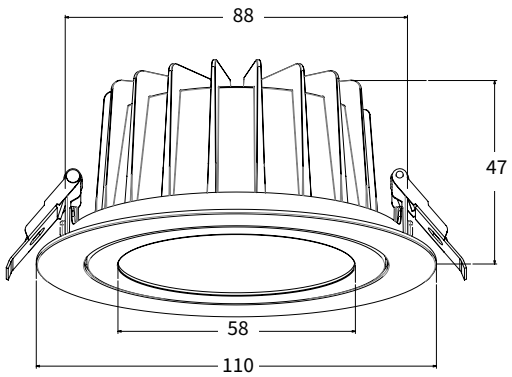

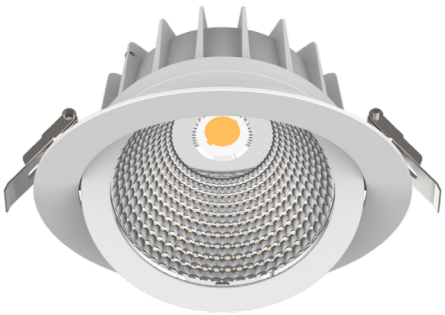



Flexible Rotary Head

© iDesigno - May 2025