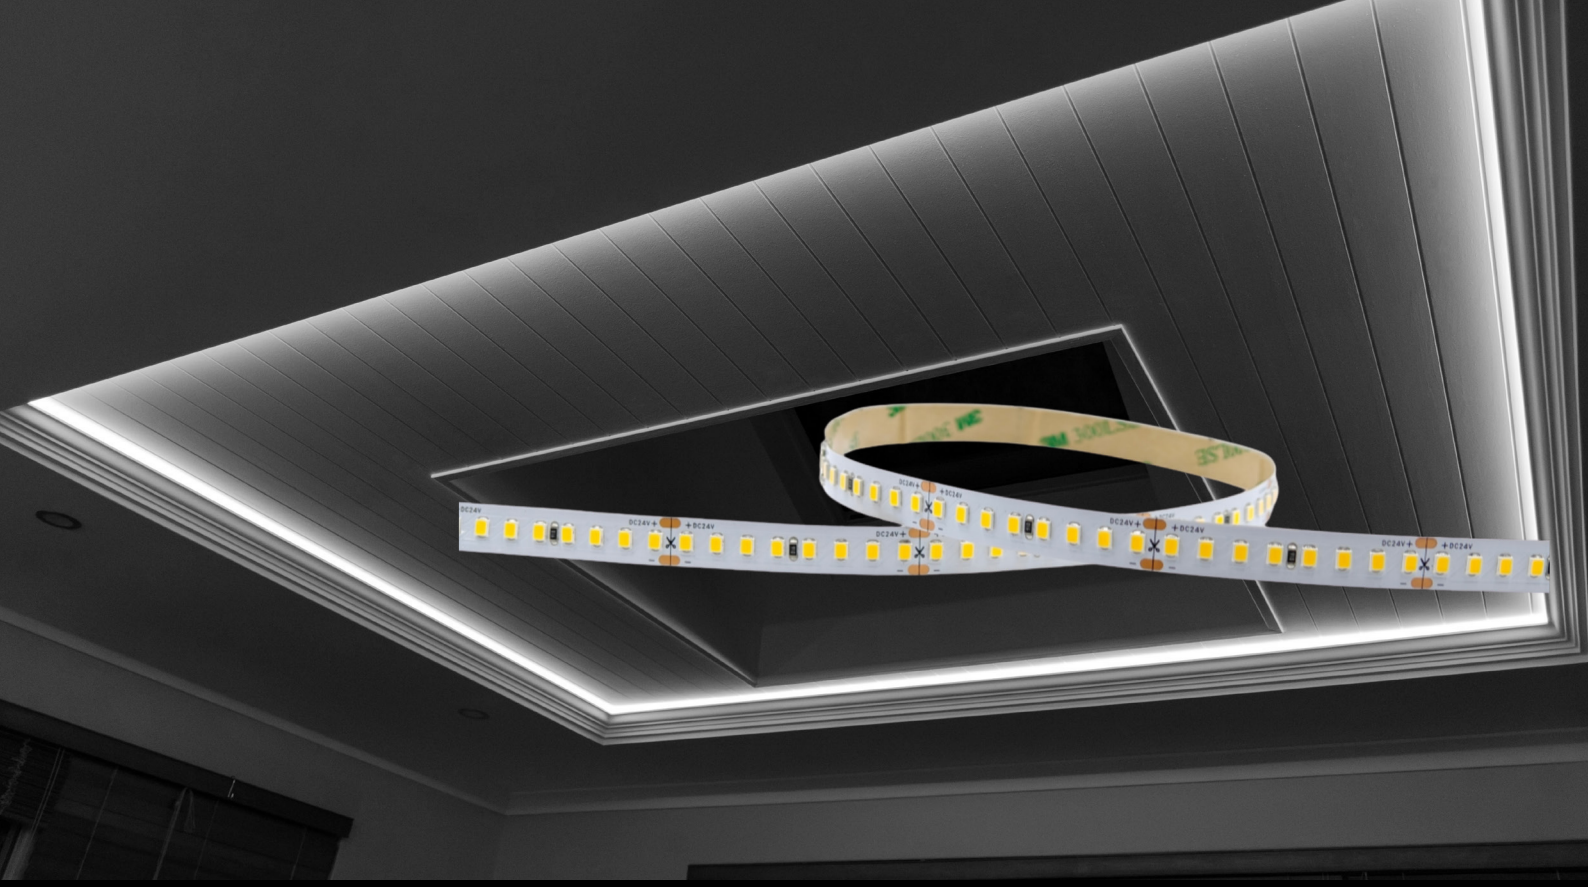

iDesigno
Vialuce 9.6W LED Strip

TECHNICAL DATA SHEET

A durable, flexible, and low-profile LED strip ideal for diverse interior lighting applications. Designed for discreet installation, it delivers uniform illumination and clean lines. Supplied with double-sided 3M tape and available with a range of extrusion options for surface, recessed, or corner mounting - ensuring a versatile, professional finish.

Areas for Application

- Under Cabinet & Joinery
- Display Case
- Retail and Displays
- Signage
- Decorative Accents
- Feature Walls

8/94 Forsyth Street
O'Connor WA 6163
08 6371 1780
sales@ledtec.com.au
www.iDesigno.com.au
iDesigno is a brand by Ledtec

Lighting Council AUSTRALIA MEMBER

ies Corporate Member 2024/2025

100% AUSTRALIAN OWNED & OPERATED

LEDTEC

TECHNICAL SPECIFICATIONS

Product	
Model	*Vialuce 9.6W/m LED Strip*

Luminaire Information	
Rated Power per Metre	*9.6W/m*
Mounting	*Double Sided Tape 3M*
Max Length	*5m*
Supply Length	*5m*

Electrical Information	
Input Voltage	*24VDC*
Driver Options	*Non-Dimmable* *Dimmable* *DALI Dimmable*

Accessories
Surface Mount Extrusion with Opal OC Diffuser
Recessed Mount Extrusion with Opal PC Diffuser
Corner Mount Extrusion

Warranty	
Warranty	*5 Years*

Construction & Protection	
Ingress Protection Rating	*IP65*
Material Composition	*Double Layer FPCB*
Operating Temperature	*-20˚C ~ +45˚C*
Storage Temperature	*-20˚C ~ +75˚C*

Physical Characteristics	
Minimum Length	*50mm*
Dimensions	*10 x 1.6mm*
Cutting Increments	*50mm*

Optical Characteristics	
Correlated Colour Temperature	*2700K - 6500K Available*
Colour Rendering Index	*90Ra*
LED Type	*SMD 2835*
Chips per metre	*160 Chips per metre*
Luminius Efficacy per metre	*3000K : 1095lm/m* *4000K: 1152lm/m*
Luminous Flux	*120lm/w (4000K)*
Beam Angle	*120°*
LIfetime	*54,000 hours*

DIMENSIONS AND CUTTING INCREMENTS

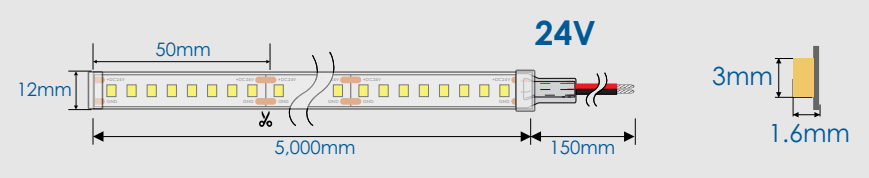

PROFILES AND MOUNTING OPTIONS

© iDesigno - June 2025